

# DMI-AES

## KEY FEATURES

The DiGiCo DMI-AES is an option card to expand the I/O of selected DiGiCo products. The DMI-AES provides 16 inputs and 16 outputs at either 48kHz or 96kHz.

- 16 inputs and 16 outputs
- 2 x 25 way "D" connectors
- SRC on all inputs



## CONNECTIONS

2 x 25 way "D" connectors

## SIGNAL PROCESSING

16 Inputs (8 pairs of AES/EBU)  
 16 Outputs (8 pairs of AES/EBU)  
 SRC on all inputs

## OPTIONS

Compatible With: S-Series / SD12 / Quantum Range / Orange Box / 4REA4

### DiGiCo Multichannel Interface



DiGiCo DMI cards are perfect for expanding your console I/O, providing interfaces with industry formats be it Analogue expansion, MAD1, Dante, Waves Soundgrid or Calrec's Hydra 2 Network.

All bases are covered

## A&E SPECIFICATION

The DiGiCo DMI-AES shall allow 16 inputs and 16 outputs of AES/EBU at 48kHz or 96kHz. The front plate of the DMI-AES shall have two 25 way "D" connectors. All AES inputs shall be provided with SRC by default. All AES outputs shall be synchronised to the mixer system clock.

The dimensions of the DMI-AES shall be: 126.4 (w) x 176.3 (d) x 58 (h) mm  
The weight of the DMI-AES shall be: 300g

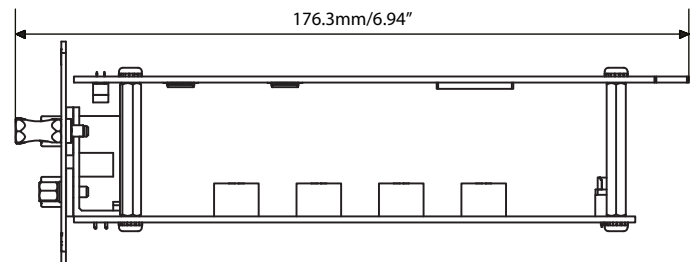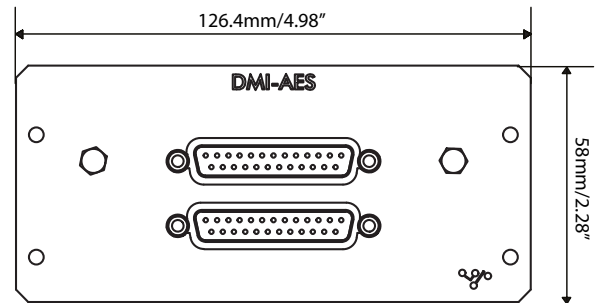

### PHYSICAL

Dimensions: 126.4mm (w) x 176.3mm (d) x 58mm (h)

Weight: 300g

Product Code: MOD-DMI-AES

### AUDIO SPECIFICATIONS

Sample Rate: 48kHz or 96kHz

#### DiGiCo HQ

Unit 10 Silverglade Business Park Leatherhead Road, Chessington,  
Surrey, KT9 2QL, United Kingdom  
info@digiconsoles.com

©DiGiCo 2019. All brand and product names are copyright to their respective owners  
E&OE

[www.digico.biz](http://www.digico.biz)

 **DiGiCo**  
[www.digico.biz](http://www.digico.biz)