



## DATASHEET

# SD Line Out Module

## KEY FEATURES

The DiGiCo SD Line Out Module is an option card to add 8 high quality analogue outputs to selected DiGiCo products.

- 8 analogue outputs
- Compatible with SD-Range and 4REA4
- Designed to be hot plugged

## WORKSURFACE

8 x XLR Line Outputs

## OPTIONS

Compatible With: SD-Rack / SD MINI-Rack / SD NANO-Rack / 4REA4



## DiGiCo SD-Range

The SD-Range caters for everything audio: be it the biggest rock and roll show on the planet, a crucial global broadcast, the most sizeable House of Worship application, or an intimate theatre performance, there is an SD console that will tick the box.

Powerful. Versatile. Smart. Desirable.



## A&E SPECIFICATION

The DiGiCo SD Line Out Module shall allow 8 analogue outputs at both 48kHz and 96kHz. The front plate of the SD Line Out Module shall have 8 XLR outputs.

The dimensions of the SD Line Out Module shall be: 30.6 (w) x 284.5 (d) x 295 (h) mm

The weight of the SD Line Out Module shall be: 570g

### PHYSICAL

Dimensions: 30.6mm (w) x 284.5mm (d) x 295mm (h)

Weight: 570g

Product Code: MOD-SDR-DAC

### AUDIO SPECIFICATIONS

Sample Rate: 48kHz or 96kHz

Latency @ 96k (Rack I-O A-A): 1.33ms

THD+N (0dBFS @ 1k): 0.002% (-94dB)

Dynamic Range D-A: 133dBu

AVG Noise D-A (20k AES17): -91dBu


D-A Frequency Response (20Hz-20kHz):  $\pm 0.35$ dB

Crosstalk: -100dB

For Nominal  $Z_{LINE}$ : 600 $\Omega$

$Z_{Out}$ : 50 $\Omega$

Maximum Output Level: +24dBu

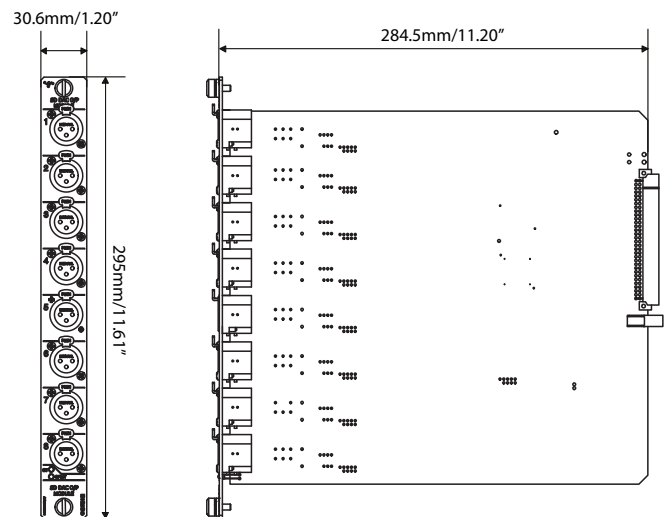

### DiGiCo HQ

Unit 10 Silverglade Business Park Leatherhead Road, Chessington,  
Surrey, KT9 2QL, United Kingdom  
info@digiconsoles.com

©DiGiCo 2019. All brand and product names are copyright to their respective owners  
E&OE